



DC FAN / 01





CHA8012□□□-XX 80x80x25

0.71~1.25 M³ / MIN

MATERIAL

FRAME	PLASTIC PBT 94V0
IMPELLER	PLASTIC PBT 94V0
LEAD WIRE	AWG26"+"RED "-"BLACK STANDARD UL 1007
OPTION	SIGNAL OUTPUT
BEARING	BALL BEARING OR SLEEVE BEARING

DIMENSIONS (in mm)

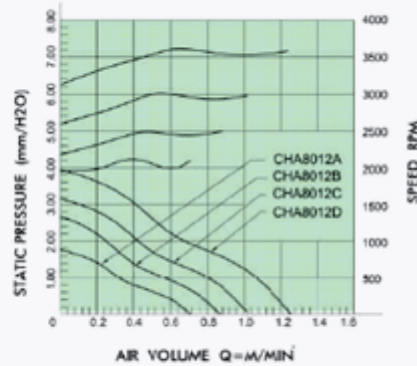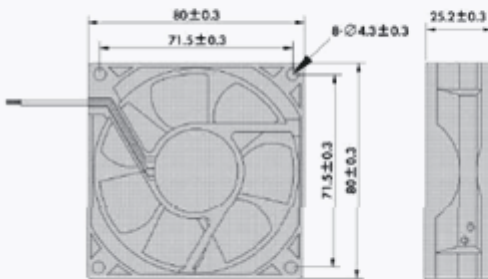

Model	CHA8012D	CHA8012C	CHA8012B	CHA8012A
Rated voltage DCV	12	12	12	12
Operating Voltage DCV	6~13.8	6~13.8	6~13.8	6~13.8
Rated Input W	3.60	2.04	1.44	1.20
Rated Current A	0.30	0.17	0.12	0.09
Operating Temperature °C	-10~70	-10~70	-10~70	-10~70
Storage Temperature °C	-40~70	-40~70	-40~70	-40~70
Speed RPM	3600	3000	2500	2100
Max, Air Flow M ³ /MIN (CFM)	1.25 (44.13)	1.05 (37.07)	0.86 (30.36)	0.71 (25.07)

